


## SPECIFICATION FOR APPROVAL

### Cavity Power Splitter

Part Number	Description	Insertion Loss	VSWR
SS-SP0825A-2	2	3.1dB	≤1.2
SS-SP0825A-3	3	5.1dB	≤1.2
SS-SP0825A-4	4	6.3dB	≤1.25
Operating Frequency	800-2500MHz		
Input Power	500W (avg.)		
Impedance	50 Ohm /Nominal		
Operating Temperature	-40 ~ +80°C		
Connector Input & Output	N Female or Customize		
PIM	≤-140 @ +43dBm×2		
Housing Material	Aluminum		
Connector Material(Body)	Brass		
Connector Plating	Inner: Ag or Au; Outer: Ni or Tri-metal		
Plating	Black or Customize		

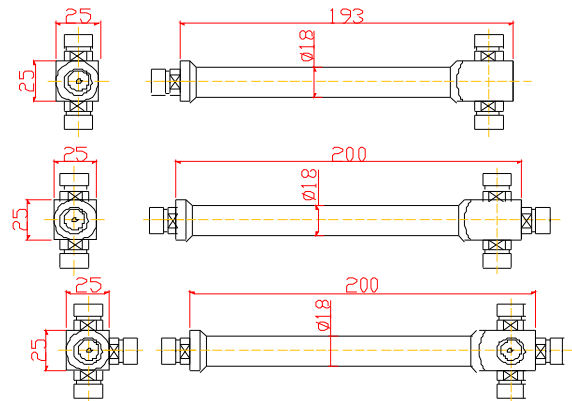

Product Image

Outline Drawing(Unit:mm)