

Drop-in Isolator 3 to 6GHz

- Ø Good temperature behavior, high aseismatic capability.
- Ø Low insertion loss, high power handling, low IMD design.
- Ø Meet RoHS standard, high quality, low price, fast delivery.
- Ø Commercial, military and space applications.
- Ø May according to demand making to order.
- Ø One year standard limited warranty.


Product Specifications:

Part Number	Freq. Range (GHz)	Bandwidth Max. (MHz)	Insertion Loss Max.(dB)	Isolation Min. (dB)	VSWR Max.	FWD/REV Power (W)	Connector Type	Temp. Range (℃)
SS-DI2528A	3-6	Full	0.5	18	1.3	100/20	Drop in	-30~+70

* The narrower frequency range you choose, the higher performance and lower cost you can expect.

* If your requirement not in list, we still can make it, please contact us.

Outline Drawing (Unit: mm)

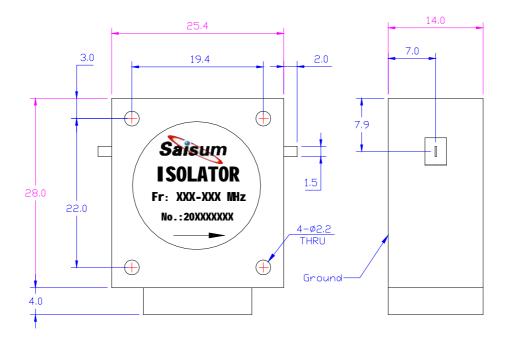

◇Tel: +86-755-88820302
◇E-mail: <u>sales@saisum.com</u>

♦ Web Site: <u>www.saisum.com</u>

◇Fax: +86-755-88820301 ◇Add: F/15,ITC Building,Southlake Road,Luohu District,Shenzhen,China.