Dual Junction Drop-in Isolator 70 to 220MHz

- Good temperature behavior,high aseismatic capability.
- Low insertion loss,high power handling,low IMD design.
- Meet RoHS standard, high quality,low price,fast delivery.
- Commercial, military and space applications.
- May according to demand making to order.
- One year standard limited warranty.

Product Specifications:

Part Number	Freq. Range (MHz)	Bandwidth Max. (MHz)	Insertion Loss Max.(dB)	Isolation Min. (dB)	VSWR Max.	FWD/REV Power (W)	Connector Type	Temp. Range (℃)
SS-HDI12060A	70-120	10	1.2	40	1.25	100/30	Drop in	-20~+65
	120-220	30	1.2	40	1.25			
	87-108	Full	1.2	40	1.25			
	85-135	Full	2.4	36	1.3			
	130-180	Full	1.6	36	1.3			

* Please specifies frequency range and power when you put order.
* If your requirement not in list, we still can make it, please contact us.

Outline Drawing (Unit: mm)

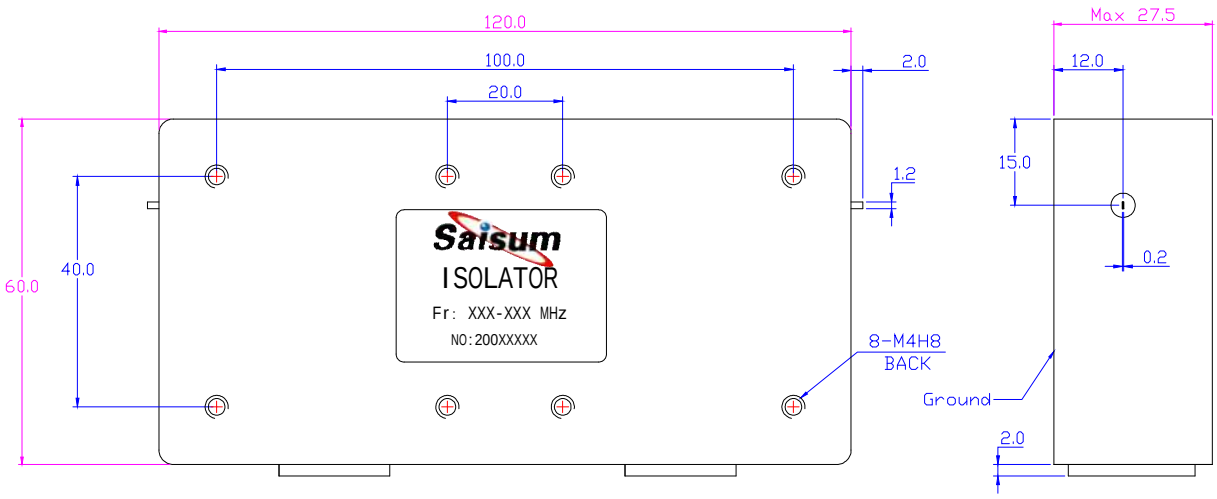

◇Tel: +86-755-88820302 ◇E-mail: sales@saisum.com ◇Web Site: www.saisum.com
◇Fax: +86-755-88820301 ◇Add: F/15,ITC Building,Southlake Road,Luohu District,Shenzhen,China.